
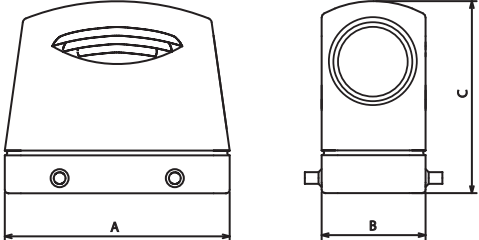


Hoods side entry with 4 pegs for two levers Custodie ingresso orizzontale con 4 perni per due leve	Size Grandezza	Thread Filettatura	No. of poles No. poli §	Part No. Codice
 <p>HC - High Construction for IP68 cable glands HC - Costruzione alta per pressacavi IP68</p> 	10B "57 x 27"	M 32	10	7810.6485.5
	10B "57 x 27"	M 40	10	7810.6486.5
	10B "57 x 27"	Pg 21	10	7810.6471.5
	10B "57 x 27"	Pg 29	10	7810.6472.5
	16B "77 x 27"	M 32	16	7816.6487.5
	16B "77 x 27"	M 40	16	7816.6488.5
	16B "77 x 27"	Pg 21	16	7816.6473.5
	16B "77 x 27"	Pg 29	16	7816.6474.5
	24B "104 x 27"	M 32	24	7824.6489.5
	24B "104 x 27"	M 40	24	7824.6490.5
	24B "104 x 27"	Pg 21	24	7824.6475.5
	24B "104 x 27"	Pg 29	24	7824.6476.5
	32B "77 x 62"	M 32	32	7832.6575.5
	32B "77 x 62"	M 40	32	7832.6576.5
	32B "77 x 62"	M 50	32	7832.6577.5
	32B "77 x 62"	Pg 21	32	7832.7142.5
	32B "77 x 62"	Pg 29	32	7832.6525.5
	32B "77 x 62"	Pg 36	32	7832.6526.5
32B "77 x 62"	Pg 42	32	7832.6527.5	

Size B Grandezza B	Poles Poli	A	B	C
57x27	10	73.5	43.5	80
77x27	16	94	43.5	80
104x27	24	120.5	43.5	80
77x62	32	94	83	94

- Types: STD For standard applications up to 500V for S-E, S-HSB, S-K inserts
 Tipo: STD per applicazioni standard fino a 500V per inserti S-E, S-HSB, S-K
- Recommended type for IP68 cable glands
 Tipo raccomandato per pressacavi IP68

§ Number of poles with S-E inserts
 Numero di poli con inserti S-E

500V